


# CERTIFICATE

Certified Passive House Component

Component-ID 1097wc03 valid until 31st December 2026

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

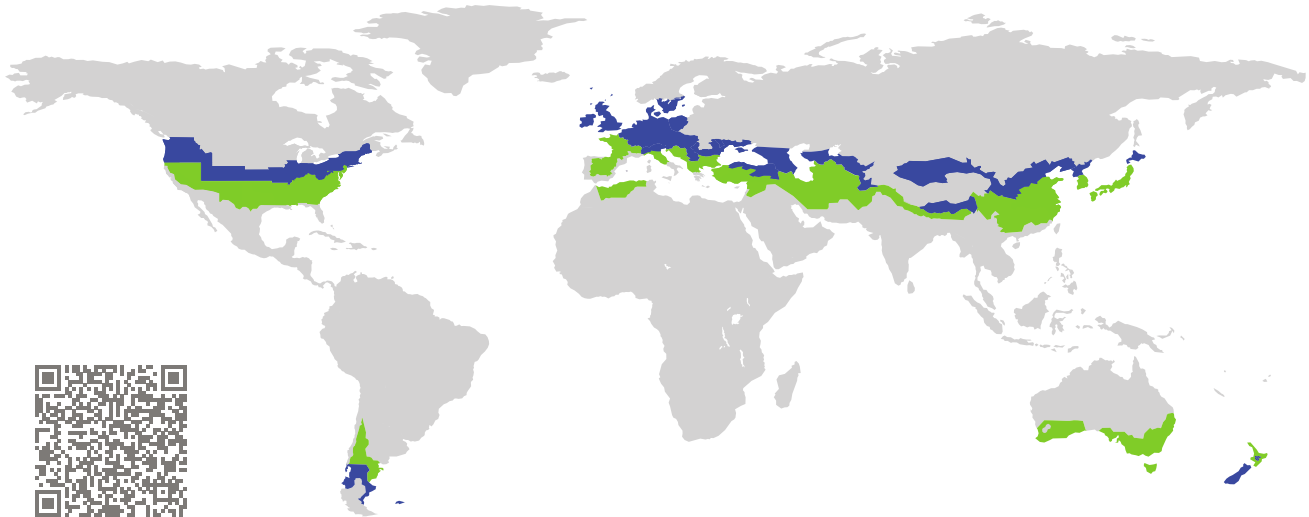


Category: **Window mounting system**  
Manufacturer: **Alumat Frey GmbH,  
Kaufbeuren, Germany**  
Product name: **MFAT 10/20 PH**

**This certificate was awarded based on the following  
criteria for the cool, temperate climate zone**

Comfort  $U_{W,installed} \leq 0.85 \text{ W}/(\text{m}^2 \cdot \text{K})$   
with  $U_g = 0.70 \text{ W}/(\text{m}^2 \cdot \text{K})$

Hygiene  $f_{Rsi=0.25} \geq 0.70$

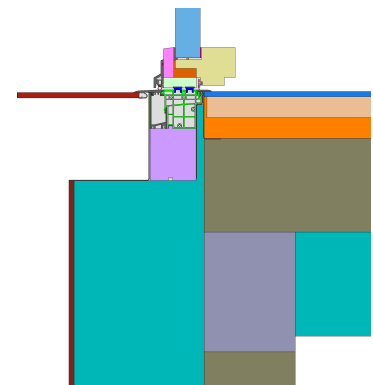


cool, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

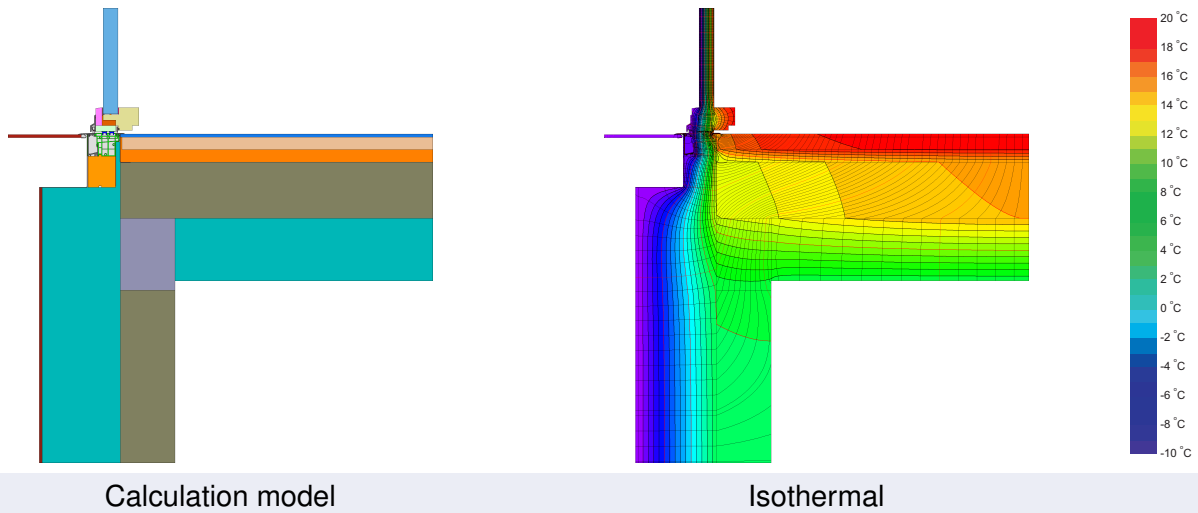

### Description

Barrier-free threshold profile made of a vinyl-aluminium composite with magnet sealants and load-bearing insulation as threshold substructure. The thresholds are compatible with all Passivehouse suitable components from timber, vinyl or aluminium with each construction depth.

### Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with  $U_g = 0.70 \text{ W}/(\text{m}^2 \cdot \text{K})$ . If a higher quality glazing is used, the window U-values will improve as follows:


|         |         |      |      |      |      |  |
|---------|---------|------|------|------|------|--|
| Glazing | $U_g =$ | 0.70 | 0.64 | 0.58 | 0.54 | $\text{W}/(\text{m}^2 \cdot \text{K})$ |
|         |         | ↓    | ↓    | ↓    | ↓    |  |
| Window  | $U_W =$ | 0.80 | 0.76 | 0.73 | 0.70 | $\text{W}/(\text{m}^2 \cdot \text{K})$ |

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).

## Validated installations

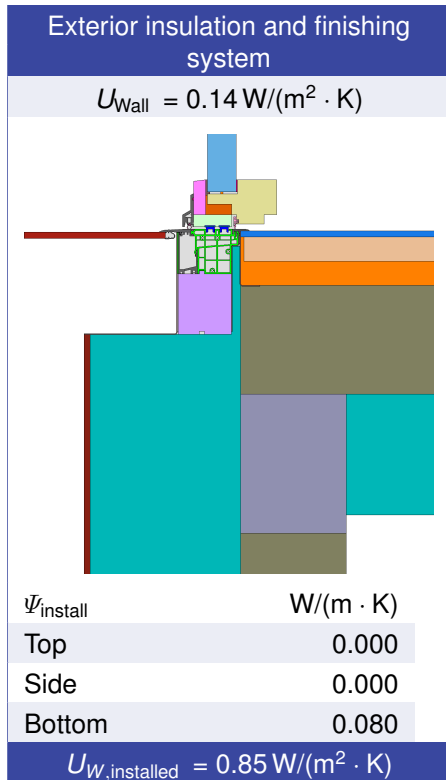

| Frame values           |       | Frame width<br>$b_f$<br>mm | $U$ -value frame<br>$U_f$<br>$\text{W}/(\text{m}^2 \cdot \text{K})$ | $\Psi$ -glazing edge<br>$\Psi_g$<br>$\text{W}/(\text{m} \cdot \text{K})$ | Temp. Factor<br>$f_{Rsi=0.25}$<br>[-] |
|------------------------|-------|----------------------------|---|--|---------------------------------------|
| Bottom                 | (OB1) | 82                         | 0.81  | 0.026  | 0.72                                  |
| Top                    | (OH1) | 165                        | 0.81  | 0.026  | 0.71                                  |
| Lateral                | (OJ1) | 165                        | 0.81  | 0.026  | 0.71                                  |
| Threshold              | (OT2) | 82                         | 0.84  | 0.026  | 0.72                                  |
| Spacer: PHI phA Spacer |       |                            | Secondary seal: Polysulfide   |  |                                       |

